

# aiwa

AudioConnect | BR412BK

User Manual  
使用者指南  
使い手説明書  
उपभोक्तागाइड  
사용자 설명서  
คู่มือการใช้  
hướng dẫn sử dụng  
प्रयोगकर्ता पुस्तिका


## Important Safety Instructions

1. Please do not install device near any form of heat sources.
2. Please use accessories specified by the manufacturer.
3. Please refer all servicing to qualified personnel should there be any form of damage to the device.
4. Keep this user manual for future reference/ troubleshooting.
5. Please heed ALL safety cautions.


## SAFETY CAUTIONS

1. Keep device AWAY from fire and heat sources at all times.
2. Do NOT attempt to disassemble or alter the device.
3. Do NOT expose the device to excessive heat. (Direct sunlight e.g.).
4. Do NOT immerse/ expose device to any form of fluids.
5. Product label is located at the bottom of the product.

## Unboxing




AudioConnect BR412BK



AudioConnect BR412BK


Please refrain from using any damaged components.  
Contact your local authorised aiwa distributor/customer service.

## Device Overview

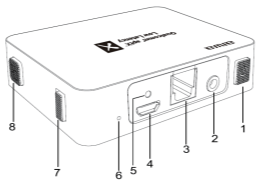


1. Power Button
2. 3.5mm Aux Jack
3. Digital Optical IN
4. Charging Port
5. Charging Indicator Light
6. Reset port
7. RX/TX Button
8. Pairing Button

## Device Walkthrough - Power ON / OFF

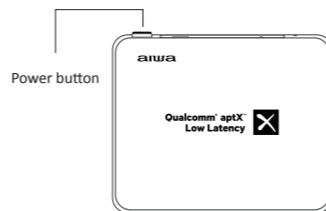

\*Flashing Blue LED (TX Mode) on top of device indicates device turned on\*  
\*Flashing Red LED (RX Mode) on top of device indicates device turned on\*

## Device Walkthrough - Battery & Charging

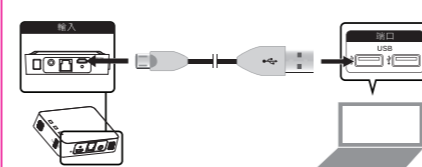


Connect Micro-USB charging cable to any power source and the AudioConnect as shown.

Charging time - Approx. 2 Hours ( 2.5 Hours on first charge)

Playback time - Approx. 20 Hours ( TX Mode)  
Approx. 12 Hours ( RX Mode)


\*Charging indicator light lights up (Red) during charging\*  
\*Charging indicator light turn off upon full charge\*  
\*Charging indicator light blinks on Low battery\*  
\*Auto shutdown within 10 minutes of inactivity\*

## Device Walkthrough - TX Mode (Transmitter Mode)

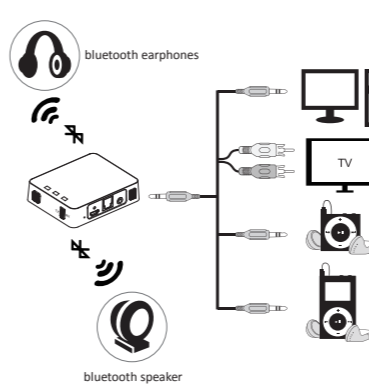

\*AudioConnect is able to connect to up to 2 Bluetooth devices simultaneously in TX Mode\*


## Device Walkthrough - TX Mode (Transmitter Mode)

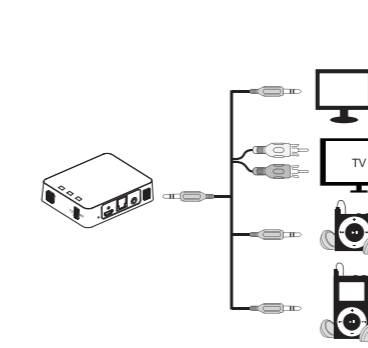

Connecting to audio source (Audio output device).


1. TOSLINK (S/PDIF)
2. RCA Adaptor
3. 3.5mm Audio Jack

## TX Mode (Connecting to audio output device) TOSLINK (S/PDIF)

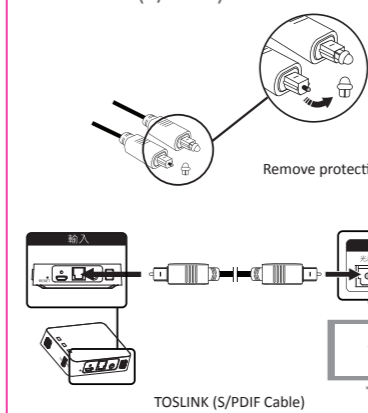


\*If you are not receiving any sound through a TOSLINK connection, please make sure that the audio output settings on your TV, DVR, and other playback sources are set to "STEREO" or "PCM". \*

## TX Mode (Connecting to audio output device) RCA Audio OUT

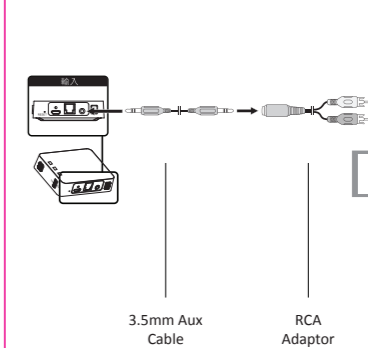


\*To enable RCA audio output, locate the audio output setting on your TV with the options "FIXED" and "VARIABLE", sometimes labeled "SET MONITOR OUT", and change this setting to "VARIABLE". If you still don't hear any sound, look for a setting that controls the TV's internal speakers and set it to "OFF". \*

## TX Mode (Connecting to audio output device) 3.5mm Audio Jack

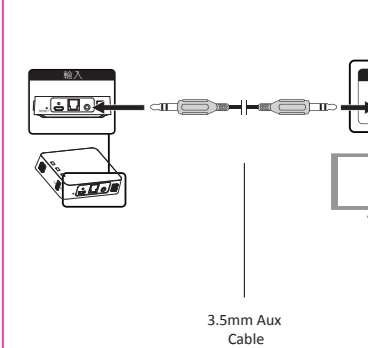


## TX Mode Pairing First Bluetooth speaker / headphones

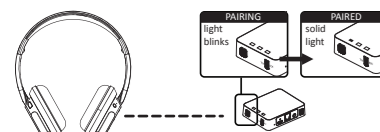

1. TX/RX switch in "TX" position.
2. Turn AudioConnect ON.
3. Make sure Bluetooth device is in pairing mode. (Within 1 Meter)
4. Press pairing button. (Flashing Blue Light)
5. Pairing successful. (Non-Flashing Blue Light)

\*Blue light flashes slowly upon disconnection\*  
\*AudioConnect will pair with last paired device automatically\*


## TX Mode Pairing Second Bluetooth speaker / headphones

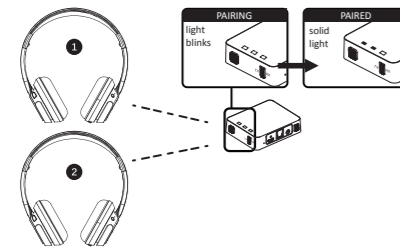

1. Make sure Bluetooth device is in pairing mode. (Within 1 Meter)
2. Hold pairing Button for 5 seconds. (Flashing Green Light)
3. Pairing successful. (Non-Flashing Green Light)


\*Green light flashes slowly upon disconnection\*  
\*AudioConnect will pair with last paired device automatically\*

## Device Walkthrough - RX Mode (Receiver Mode)

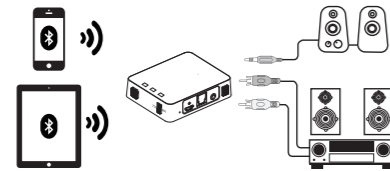

\*Audio connect can only pair with 1 audio source only.\*  
\*AudioConnect would pair with the last paired device upon turning ON\*


## RX Mode (Pairing with Bluetooth Audio source)

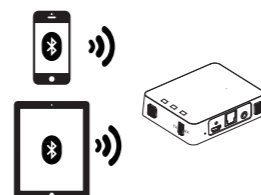

1. TX/RX switch in "RX" position.
2. Turn AudioConnect ON.
3. Make sure Bluetooth device is in pairing mode. (Within 1 Meter)
4. Press pairing button. (Flashing Red Light)
5. Pairing successful. (Non-Flashing Red Light)


\*Red light flashes slowly upon disconnection\*  
\*AudioConnect would pair with the last paired device upon turning ON\*

## Device Walkthrough - Clearing Paired List

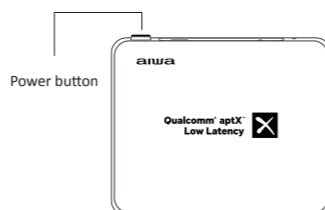


Double click Power button twice.  
(Blue and red light will flash for 5 seconds)

## Device Walkthrough - Reset Device

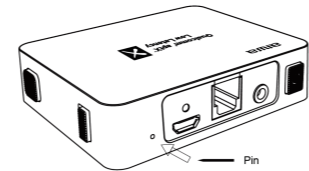

Insert needle/pin into the reset port for 3 seconds.

## Cleaning & maintenance



Wipe the AudioConnect with a soft dry cloth.

Do not use any corrosive chemicals to clean the AudioConnect.

Do not allow any liquids to enter any openings.

## Troubleshooting

AudioConnect could not be turned on/ does not work.  
Perform device reset.

## Customer service

For more product information please visit [www.int-aiwa.com](http://www.int-aiwa.com).

Contact your local authorised dealer/ customer service. Refer to the warranty label provided in the box.

## Limited Warranty

Please refer to the warranty label provided in the box.

Note: Disassembling device voids warranty.  
Note: Liquid submersion voids warranty.

## Device specifications

Model - BR412BK

Bluetooth - V4.1 CSR8670

Support Profile - A2DP, aptX

Codec - aptX Low Latency, aptX, SBC

Pin Code supported - 0000

Size - 67 x 53 x 18 mm

Battery - 500mah/3.7V rechargeable lithium battery

Compatibility - RCA, 3.5mm, Optical TOSLINK

Connection range - < 10m

Weight = 46g

# aiwa

Aiwa Electronics Int'l Co., Ltd.  
Explore more at [www.int-aiwa.com](http://www.int-aiwa.com)