


AT-X80E II

True Wireless Earphones

ENG

AIWA Electronics International Co., Ltd.
Explore more at www.int-aiwa.com

Product Overview

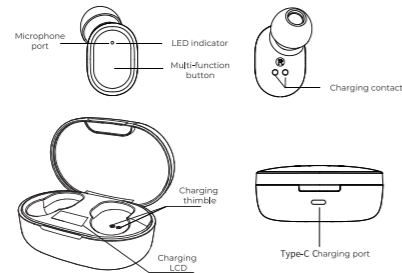

Unboxing

- AT-X80E Earbuds
- Portable Charging Case
- Braided Nylon Type-C Charging Cable
- Silicone Ear-tips
- User' s Manual

Please refrain from using any damaged components; Contact your local authorized AIWA distributor/customer service.

Product Specifications

Model Number: AT-X80E II
BT Version: V5.1
Battery (Earbuds): 3.7V/38mAh
Battery (Charging Case): 3.7V/200mAh
Supported Profiles: HFP/HSP/A2DP/AVRCP
Sensitivity: 94dB ± 3dB S.P.L @ 1KHz
Transmission Distance (Estimated): 10 Meters (No Obstacles)
Playback/ Call Time: 4 Hours
Standby Time: 70 Days
Charging Time (Charging Case): 1.5 Hours
Charging Time (Earbuds): 1.5 Hours

The above are estimated values tested in a practical environment and may vary upon individual usage habits. Charging case holds approximately 2-3 charges of earbud's full battery capacity depending on playback volume.

Product Usage Guide

POWER ON:
(Automatic) : Remove earbuds from charging case.
(Manual) : Press and hold both L and R side earbuds for three (3) seconds.

SHUT DOWN :
(Automatic) : Place earbuds back into charging case.
(Manual) : Press and hold both L and R side earbuds for five (5) seconds.

AUTOMATIC CONNECTION:
AT-X80E would automatically connect with the last connected mobile device.

PLAY/PAUSE:
Click L or R side earbuds ONCE.

PREVIOUS TRACK:
Press and hold L side earbud for two (2) seconds (Short "Beep").

NEXT TRACK:
Press and hold R side earbud for two (2) seconds (Short "Beep").

VOLUME + :
Double click L side earbud.

VOLUME - :
Double click R side earbud.

ANSWER/HANGUP CALLS:
Click L or R side earbuds once.

REJECT CALLS:
Press and hold L or R side earbuds for two (2) seconds.

REDIAL NUMBER:
Triple Click L side earbud.

VOICE ASSISTANT:
Triple Click R side earbud.

LOW BATTERY PROMPT:
Low battery notification tone will trigger every thirty (30) seconds until earbuds are powered off.

Connecting the Product

- LINK LEFT (L) AND RIGHT (R) SIDE EARBUDS
1. Power on Earbuds (Automatically/Manually).
 2. Earbuds will enter linking state (Alternating red & white lights)
 3. Earbuds will link automatically with each other (Sound prompt, One side indicator light will extinguish, the other side will remain alternating red & white (either earbud)
 4. Earbuds are now linked to each other and is ready to be paired with mobile device.

PAIR MOBILE DEVICE WITH EARBUDS

1. Turn on Bluetooth (BT) on your mobile device.
2. Turn on Earbuds.
3. Search and connect to "AT-X80E II" from your mobile device.

"Beep" prompt sound (R side) indicates successful pairing.
Extinguished indicator lights on both earbuds indicates successful pairing.

SINGLE EARBUD PAIRING
Please refer to the same pairing method (PAIR MOBILE DEVICE WITH EARBUDS) as mentioned above.

Charging

- AT-X80E Earbuds
- Portable Charging Case
- Braided Nylon Type-C Charging Cable
- Silicone Ear-tips
- User' s Manual

CHARGING THE EARBUDS:

Place earbuds back into charging case to charge earbuds.
Earbuds indicator lights lighting up in red indicates charging in progress.
Earbuds indicator lights OFF indicates earbuds fully charged.
Built-in LCD will reflect current battery level of the earbuds.
Built-in LCD will turn off upon earbuds full charge.

Precautions

1. Please charge device in a safe environment. Kindly avoid overcharging the device.
2. Please adjust the playback volume to an appropriate level to avoid hearing damage/ loss of awareness to your surroundings.
3. Avoid using earbuds in a place where there might be interference signals.
4. Avoid using earbuds in a potentially dangerous situation/ harmful environment that might cause harm to the user/ product itself.

E-Manu

